GRÖNT LJUS AB
www.grontljus.com

LED T8 BATTEN CLICK REFLECTOR

DESCRIPTION

T8 Batten Click Reflector is pre-wired for an easy installation of LED T8 tubes. The luminaire is very economical and has an unbeatable price-quality ratio, and thus makes a switch to LED lighting low-threshold for every budget. Due to the low maintenance and replacement costs, the fast installation and substantial energy savings, a very low total cost of ownership and a short payback time are guaranteed.

APPLICATIONS

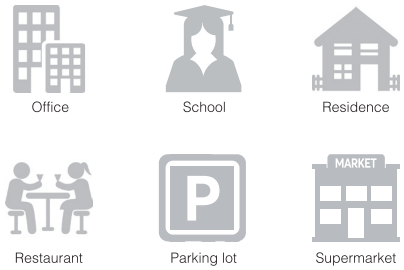

SPECIFICATIONS

Item description
LED T8 Batten Click Reflector 1x36 1200
LED T8 Batten Click Reflector 1x58 1500
LED T8 Batten Click Reflector 2x36 1200
LED T8 Batten Click Reflector 2x58 1500

TECHNICAL SPECIFICATIONS

Technical specifications	
Dimmable	No
IP	20
IK	02
Protection class	I
Intergtated driver (Yes/No)	No
Grow wire test	650 °C

Electrical supply	
Voltage (V)	220-240
Frequency (Hz)	50-60

Mechanical properties	
Housing material	Steel
Housing color	White

Application	
Operating temperature	-20~+50 °C

Certifications	
Fixture certifications	CE

PACKAGING INFORMATION

Box 1 item		Masterbox		
Dimension (mm) (LXWXH)	Weight (kg)	Units per masterbox	Dimension (mm) (LXWXH)	Weight (kg)
1225x120x68	0.7	8pcs	1240x260x295	6.5
1525x120x68	0.86	8pcs	1550x260x295	7.5
1225x137x66	0.76	8pcs	1240x295x280	7
1525x137x66	0.91	8pcs	1540x295x280	8.5

DETAILS

Single tube

Double tube

DIMENSION

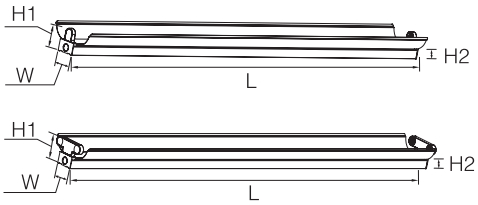
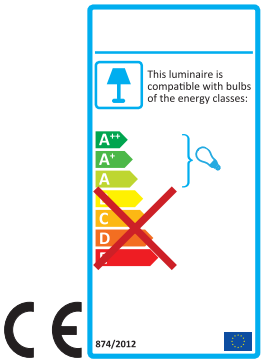
	1X36W	2X36W	1X58W	2X58W
L	1224mm	1224mm	1524mm	1524mm
W	115mm	133mm	115mm	133mm
H1	63mm	61mm	63mm	61mm
H2	23mm	23mm	23mm	23mm